



# 2020 WARRANTIES BUBBLE COVERS / FOAM COVERS

## ENERGYGUARD 2, SOLGUARD, SUNDOWN, MIDNIGHT, EXTRASUN, ISODEL

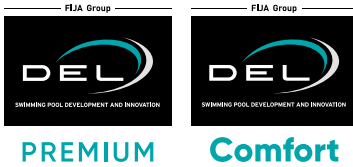

500 micron bubble covers with "Geobubble technology" are guaranteed for six summer seasons with a degressive rate of 15 %.  
 400 micron bubble covers with "Geobubble technology" are guaranteed for three summer seasons with a degressive rate of 30 %.  
 400 micron bubble covers are guaranteed for two six summer seasons with a degressive rate of 50 %.  
 Isodel covers are guaranteed for 1 year in normal conditions of use (temperature < 30°).  
 The wearing of coping or the area around the pool is not covered by the warranty.

## CRYSTAL BLUE, BLUE BLUE, SILVER BLUE, TRANSLUCENT GREY, OPAQUE GREY

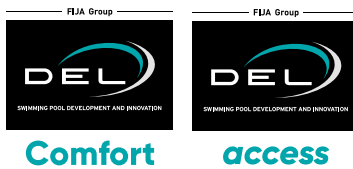

500 micron summer covers are guaranteed for 3 years with a degressive rate of 30 %.  
 300 and 400 micron summer covers are guaranteed for 2 years with a degressive rate of 50 %.

## ENERGYGUARD 2, SOLGUARD, SUNDOWN, MIDNIGHT, EXTRASUN, BLUE CRYSTAL, BLUE BLUE, BLUE SILVER, TRANSLUCENT GREY, OPAQUE GREY, ISODEL



These covers must be protected with a protective tarpaulin when they are not on the pool. These covers must be placed away from frost in winter.

The wearing of coping or the area around the pool is not covered by the warranty. Dimensional stability: 1 %.

Do not leave the bubble cover on during shock treatment (48 hours).

Rinse the cover using clean water 2 to 3 times per season. Before taking it in for winter, rinse thoroughly and leave to dry.

Summer cover water treatment: in compliance with applicable legislation (French decree n° 81324 of 7.4.81), swimming pool water treated with chlorine must comply with the following values: pH between 6.9 et 7.7 active free chlorine between 0.4 and 1.4 mg/l - combined chlorine max 0.6 mg/l - TH and TAC between 10 and 30°f.

Foam cover water treatment: in compliance with applicable legislation (French decree n° 81324 of 7.4.81), swimming pool water treated with chlorine must comply with the following values: pH between 6.9 et 7.7 active free chlorine between 0.4 and 1.4 mg/l - combined chlorine max 0.6 mg/l - TH and TAC between 10 and 30°f.

Never use the Isodel cover or summer covers for outdoor overflow pools because of the surface area exposed to the wind (unless previously agreed with our technical service).