

# **ABOVE-GROUND AUTOMATIC SLATTED COVER**







A modern and customisable design



# **ABOVE-GROUND AUTOMATIC SLATTED COVER**

# MOON

## + AESTHETIC

- Elegant and modern end-stands imagined by our own designers.
- Discretion assured with end-stands hidding the cover while the slat is rolled.


## **FINISHES**

- All materials and components have been carefully selected for a perfect stability and an optimal rending.
- The composite thermoplastic end-stand allows an easier maintenance and a excellent resistance to impacts and scratches.

## **CUSTOMISABLE**

- Available in electric or solar version.
- Different choice of colours for a perfect integration in your environment.
- Possibility to customise your central disk colour to add a modern touch.



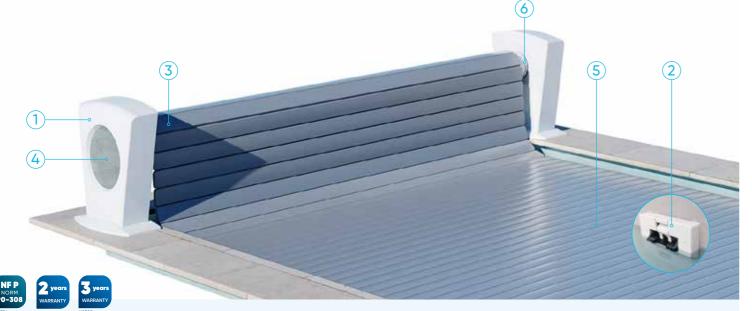

Cover available for pool from 2.00 x 3.00 m  $\,$ and up to 5.00 x 13.50 m.

### 1 END-STANDS

- Composite and thermoplastic structure.
- Excellent resistance to impacts and scratches. · Aluminium frames.
- Other end-stand colours on request (option).

# 2 LOCKING KITS

### (3) MOTORISATION

#### Tubular electric motor:

- · Adjustable mechanical ends-of-runs, free-wheeling motor (used to unroll the slats in case of a motor breakdown and to keep the pool safe despite the absence of electricity).
- The lifetime of the motor is longer thanks to the bearings which support the tube and therefore the weight of the cover.
- Controlled by Wi-Key, key switch or LivePool.

### (4) CENTRAL DISK

• 7 disk colours are available or specify your RAL as an option.

• Solar polycarbonate slats or opaque 69 PVC slats.



# Your slats choice

All our slats have a quality finish and are compliant with the NF P90-308 standard.

#### Solar polycarbonate slats







Crystal green



# **USEFUL TO KNOW**

Choose solar polycarbonate slats to heat your pool water.

#### **Opaque PVC** slats









**DON'T FORGET** 

## Protect your slats from UVs and dirt

with the IVERNEA winter shift or the IVERNEA PLUS 4-season protective





Opening and closing of the automatic cover with a smartphone thanks to the LivePool application (except solar version).





with the standard NF P90-308. It is no substitute for common sense or individual responsability. It is not intended either to be a substitute for parental and/or adult supervision, which is the essential factor for the protection of young childrens. A child can get drawned within less than 3 minutes; no type of protection will ever replace the vigilance and supervision of responsible adults.

Warranty: 2 years for the reel system and 3 years for the motor. 3 years for opaque PVC slats and 5 years for solar polycarbonate slats, in accordance with our general sales terms.

Order form: to have a cover correctly adjusted to the pool, it is essential to provide a drawing of the pool with measurements taken every 1 meter. In accordance with the standard NF P90-308, the gap between the inside of the pool and the edge of the cover must be less than 70 mm.

Operating time: for a pool of 5.00 x 10.00 m: 3 minutes for the automatic opening or closing and 30 secondes for the locking or unlocking of the safety kits. One person only can do the opening and closing of the Moon.

Use: for all seasons. For a proper functioning, maintain a constant water level corresponding to a normal filtration of the pool. It is essential to have a water level regulator. The water level have to comply with the technical notice.

 $\textbf{Use limits:} \ \textbf{The installation of an automatic DEL cover on overflow pools and/or with}$ a stair along the length (detechable side stair) does not comply with the standard NF P90-308. Another safety device should be used in that case. Unless otherwise specified by the manufacturer, under water glarms are not compatible with DEL covers

Wintering: the swimming pool must be wintered on the basis of its geographical location. Without lowering the water level, close the cover to its safety position and where applicable install a wintering net to protect the cover. If the water level is lowered so that the wall units are above the waterline, roll the cover in and secure the pool using a winter safety cover.

Packing list: for a swimming pool measuring 5.00 x 10.00 m. Slats: 5 packages: 5.10 x  $0.25 \times 0.20 \text{ m} - 250 \text{ kg} / \text{Tube: 1 package: } 5.46 \times 0.20 \times 0.20 \text{ m} - 30 \text{ kg} / \text{End-stands:}$ 1 pallet: 0.80 x 0.60 x 0.55 m - 40 kg / Total weight: 350 kg.

Manufacturer: DEL SAS - ZA La Croix Rouge 35530 Brécé - France / www.del-piscine.fr

# FOR MORE INFORMATION PLEASE ASK YOUR POOL EXPERT

CF GROUP - DEL SAS - ZA LA CROIX ROUGE - 35530 BRÉCÉ - FRANCE