

## SLATS

# OPAQUE PVC 84 SLATS



SAFETY

**A unique slat design for in-ground automatic slatted covers**



## SLATS

# OPAQUE PVC 84 SLATS

### + MODERN AND SLEEK



- A new and unique design on the market. The black flexible joints and caps bring contrast with the color of the slats.
- The boat deck-like flexible joints make cleaning between the slats easy.
- The flat slats look perfect on the water.
- Registered and patented model.

### + MATERIAL

- Extruded PVC slats without lead-based additive.
- The slats are UV-protected and have a good resistance to stains and organic deposits.
- Material compliant with age resistance requirements defined by french standard NF T54-405-1: 2013.

### + CAPS AND FLANGES

- The black caps are welded for a perfect watertightness.
- Standard flange size is 2.50 cm. S size flanges (-1 cm) and XL size flanges (+1 cm) are also available to adjust the dimension of the slats if necessary.
- For a more optimal and qualitative appearance of your slats, our radius-end caps can be adjusted to the radius of your pool or stairs.

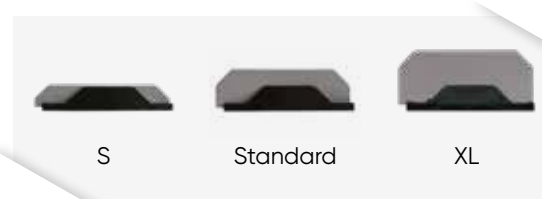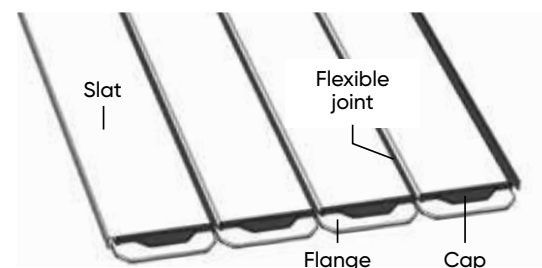

## Slat colours

All our slats are compliant with the NF P90-308 french standard\*.




Flexible joints and caps are black.  
Flange's colour is the same as the slats.

\*To comply with the French safety standard NF P90-308, the slats must have a minimum width of 2.50 m.


## USEFUL TO KNOW

The opaque PVC 84 slats are available for:


- In-ground automatic slatted cover
- Pools wide up to 5.00 m
- Pushlock locking system only
- Pools with radius
- Pools with cut-out or stairs
- Pools with overflow or mirror




5 cm radius




10 cm radius



15 cm radius



20 cm radius



Pool with  
cut-out or stairs



Pool with  
overflow or mirror

## Why cover your pool?


- To reduce the water consumption by limiting evaporation.
- To save energy.
- To make cleaning easier & reduce the use of chemical products.

## DON'T FORGET

The Pushlock  
locking kits  
of your cover ensure  
the safety of your pool.





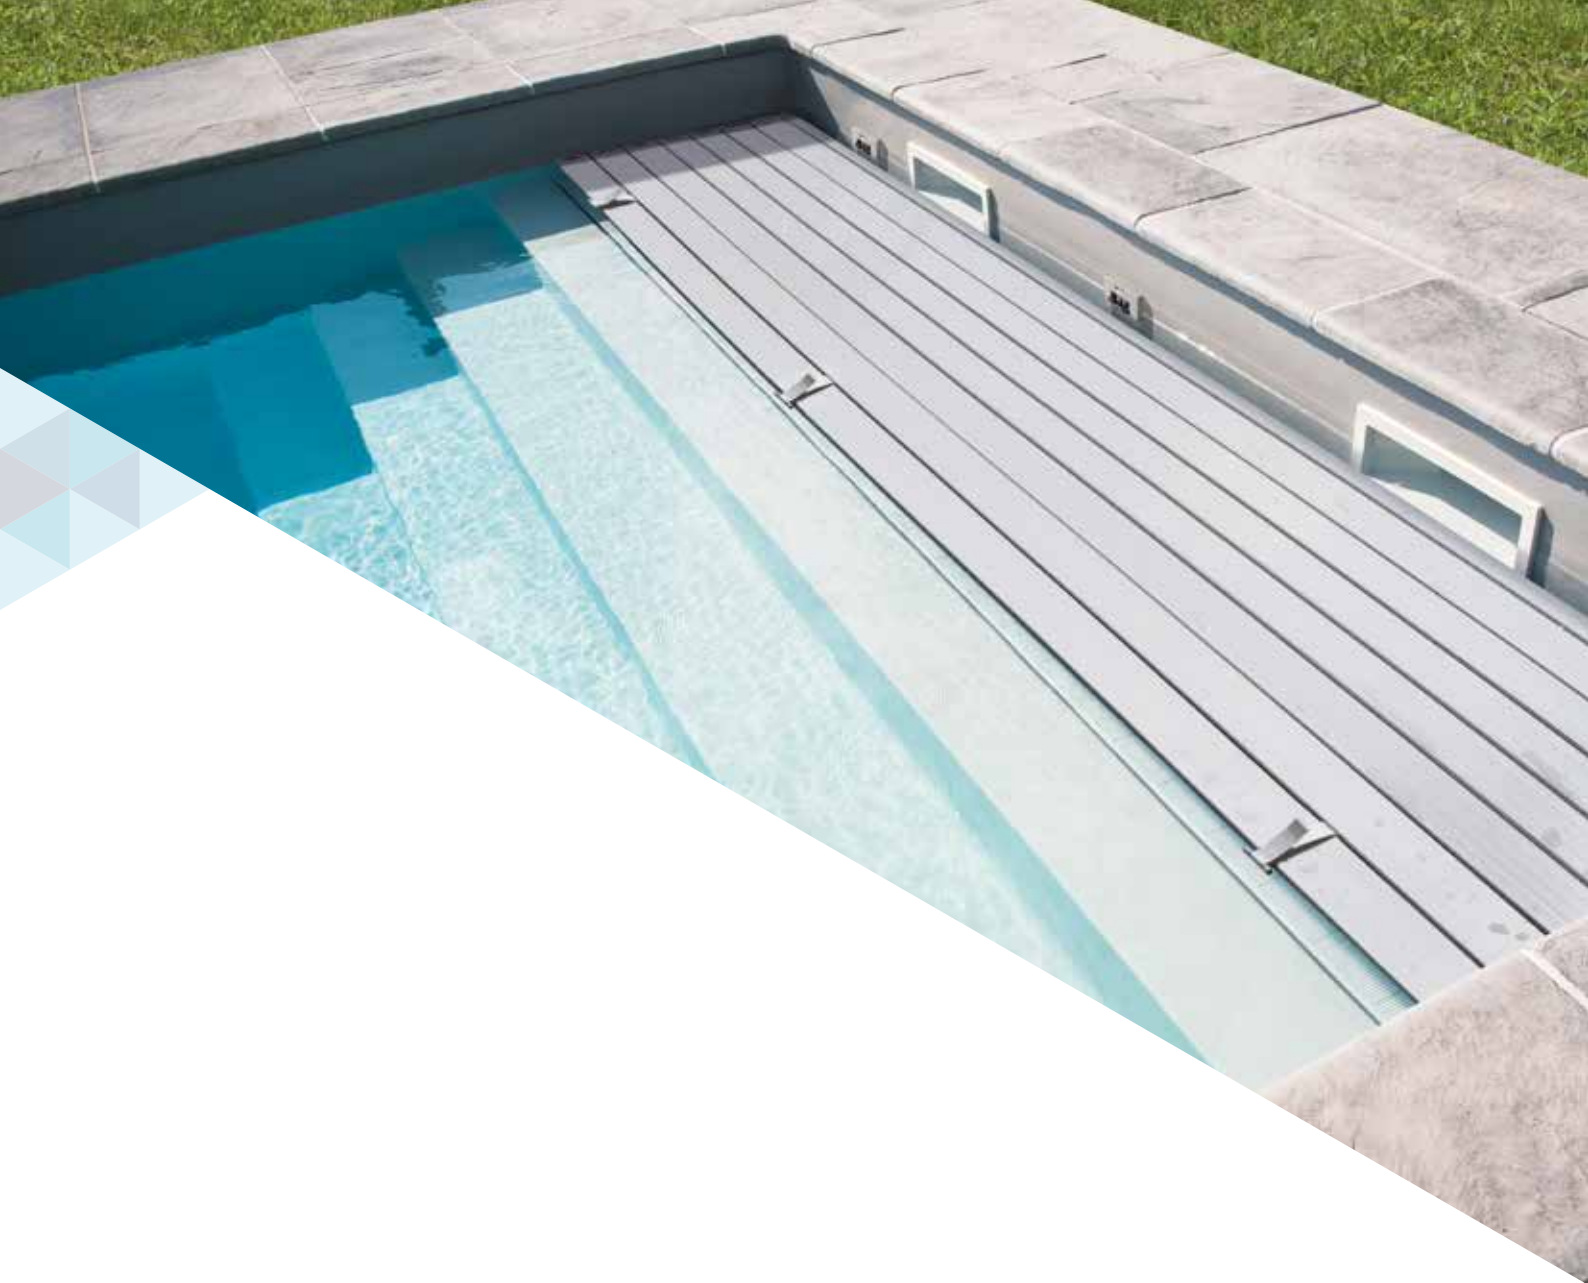

#### **Read carefully and keep for future reference.**

The slats are parts of the slatted cover designed to prevent children under 5 years of age from accessing the pool. This product complies with the French safety NF P90-308 standard. It is no substitute for common sense or individual responsibility. It is not intended either to be a substitute for parental and/or adult supervision, which is the essential factor for the protection of young children. A child can get drowned within less than 3 minutes; no type of protection will ever replace the vigilance and supervision of responsible adults.

**Warranty:** 3 year for opaque PVC 84 slats in accordance with our general sales terms.

**Order form:** to have slats correctly adjusted to the pool, it is essential to provide a drawing of the pool with measurements taken every 1 meter. In accordance with the French safety NF P90-308 standard, the gap between the inside of the pool and the edge of the cover must be less than 70 mm.

**Time needed to close a pool measuring 5.00 x 10.00 m:** 3 minutes for automatic opening or closing and 30 seconds for locking or unlocking the safety kits. Slats can be opened or closed by one person.

**Use:** for all seasons. For a proper functioning, maintain a constant water level corresponding to a normal filtration of the pool. It is essential to have a water level regulator. The water level has to comply with the technical notice.

**Use limits:** DEL covers on overflow pools can only be compliant if the pool is equipped with a Vitalia INFINITY type device that automatically lowers the water level by at least 2 cm when the cover is closed on the pool. To date, DEL covers with a removable form on a side staircase do not comply with the French safety NF P90-308. Unless otherwise specified by the manufacturer, under water alarms are not compatible with DEL covers.

**Wintering:** the swimming pool must be wintered on the basis of its geographical location. Without lowering the water level, close the cover to its safety position and where applicable install a wintering shift to protect the cover. If the water level is lowered so that the wall units are above the waterline, roll the cover in and secure the pool using a winter safety cover.

**Packing list:** for a swimming pool measuring 5.00 x 10.00 m. Slats: 4 packages: 5.10 x 0.39 x 0.11 m - 190 kg.

**Manufacturer:** DEL SAS - ZA La Croix Rouge 35530 Brécé - France / [www.del-piscine.fr](http://www.del-piscine.fr)

**FOR MORE INFORMATION PLEASE ASK YOUR POOL EXPERT**

